

maxi orange[®]

PART NO. FP2210

GB

DESCRIPTION

The Aspen Maxi Orange pump is designed to be installed:

- above the false ceiling where possible
- behind wall mounted evaporators
- in plastic conduit

There are two reservoirs to choose from, which must sit flat and horizontal. One allows you to connect directly to the drain hose of the evaporator and the second reservoir can be placed directly into a condensate tray.

IN THE BOX


- 1 x Maxi Orange pump
- 1 x Anti Siphoning Device
- 1 x 1.5m 6-pin socket lead assembly
- 1 x Reservoir
- 1 x Reservoir lid with 1.5m sensor cable
- 1 x Submersible reservoir
- 1 x Float and Filter
- 1 x 1.5m Suction tube 14mm ID
- 1 x 220mm Orange inlet hose 6mm ID
- 1 x 150mm Vinyl breather tube 6mm ID
- 1 x Drain tray connector
- 2 x Cable ties 140 x 3.6mm
- 4 x Cable ties 300 x 3.6mm
- 2 x Velcro strips

SPECIFICATIONS

- Pump rating: 230V AC, 15W
- 1PH 50 Hz
- 3A volt-free alarm wires, N.O., N.C. contacts rated @ 5A inductive at 230V
- Hall effect semi conductor level sensors, with high level safety
- Maximum water temperature: 40°C
- Continuously rated
- Class II appliance
- Fully potted
- Thermally protected
- 66mm (h) x 122mm (w) x 44mm (d)
- Weight: 0.45kg

PERFORMANCE

- Water flow rate: 26L/hr at zero head
- Maximum recommended head: 15m
- 35dB(A) @ 1m

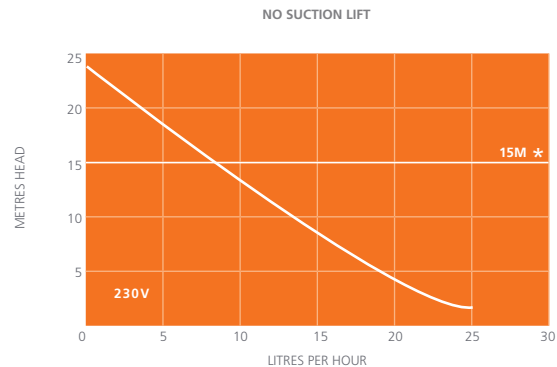

HORIZONTAL LOSSES

Vertical Head	L/h	Horizontal (max 100)		
		30m	60m	90m
3m	20	18	17	
	20	18	17	

Specifiche e prestazioni Orange

- Cavi d'allarme privi di tensione da 3 A, contatti N.O./N.C. nominali a 5 A induttivi a 230 V
- Sensori di livello a semiconduttore con effetto "Hall", con sicurezza di alto livello
- Temperatura massima dell'acqua: 40 °C
- Funzionamento continuo
- Apparecchiatura in Classe II
- Motore pompa rivestito in resina

Maxi Orange:

- Tensione nominale pompa: 230 V CA, 15 W
- 1PH 50 Hz
- Portata d'acqua: 26 litri/ora con prevalenza zero
- Prevalenza massima raccomandata: 15 m
- 35 dB(A) @ 1 m
- 66 mm (A) x 122 mm (L) x 44 mm (P)
- Peso: 0,45 kg